


Maintenance Instructions

For

Dixon Bayco

DBC62LVPR-300 DRY DISCONNECT COUPLER

DBC62VPR-300 DRY DISCONNECT COUPLER

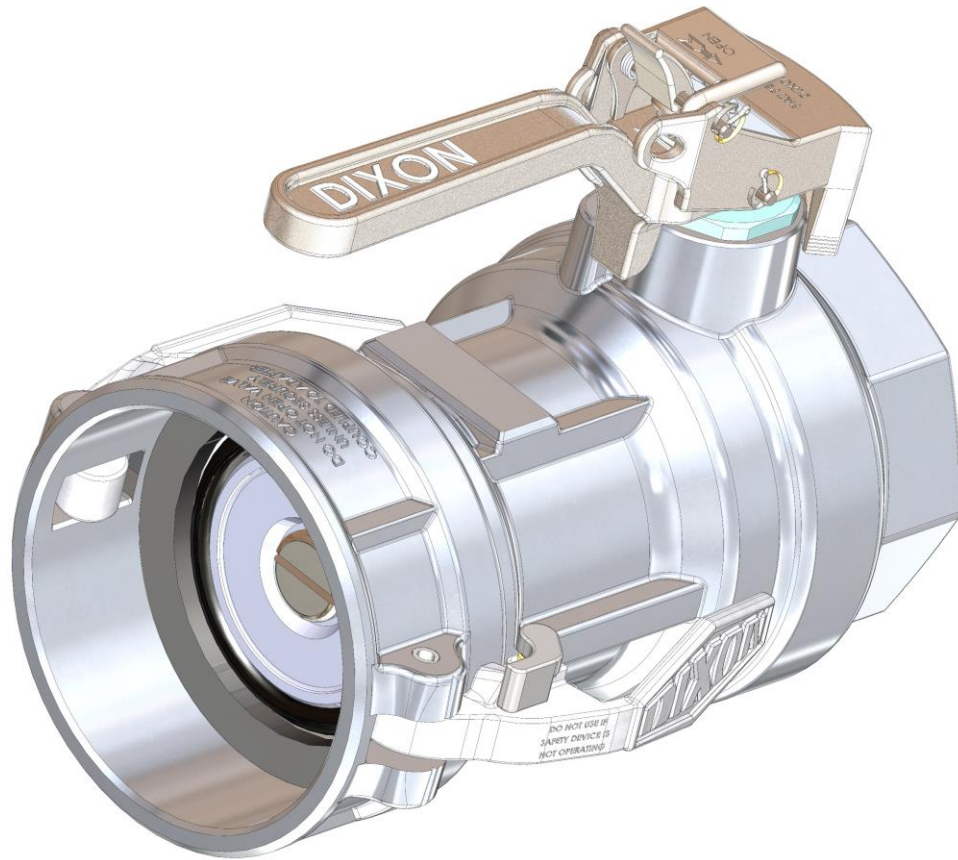


The Right Connection®

dixonvalve.com

INSTRUCTIONS:

CAUTION: All lubricants used in the maintenance of Dry Disconnects must be compatible with the seal material used and also with the commodity being transferred through these fittings.

CAUTION: Never rotate the LEVER to the open position while the coupler is under pressure and not coupled to a Dry Disconnect Adapter. This action can cause the LEVER to rapidly rotate and cause injury.

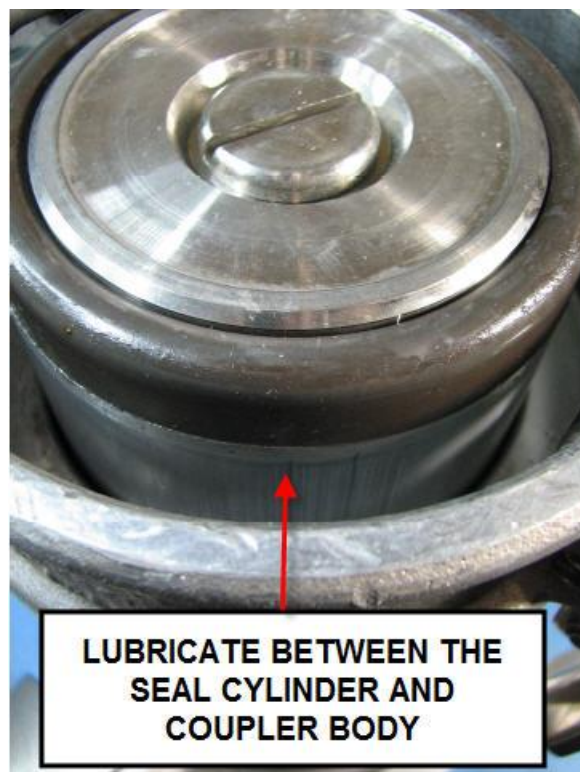

- A. With the coupler not connected to the adapter, open the coupler and allow the seal cylinder to move out of the coupler. It may be necessary to use some spray lubricant to break the seal cylinder free.
- B. With a shop rag, wipe clean any old grease and dirt from the outside of the seal cylinder.
- C. Apply grease made by "Super Lube part number 41160 by Synco Chemical Corp if available or spray a white lithium grease around the seal cylinder. Use a small amount of grease (just enough to wet the outside of the seal cylinder).
- D. Actuate the handle several times from the open position to the closed position to verify the seal cylinder and poppet move freely.
- E. Close the coupler and return to service.

F. Service the coupler monthly.

DIXON WARRANTY:

For Warranty Information, please refer to the inside back cover of the latest Dixon Catalogue.

Waste Disposal

"Kalrez" perfluoroelastomer semi finished parts and shapes generally may be disposed of by landfill or incineration, but any disposal method selected must be in accordance with applicable federal, state/provincial and local regulations. If incineration is employed, the incinerator must be capable of scrubbing out acidic combustion products. Note: Semi finished parts and shapes made from compounds 1058 and 3065 contain lead oxide and particular requirements may apply (see, e.g., 40 C.F.R. 261.24). A waste generator should perform a waste characterization before disposing and manage and dispose in accordance with all potentially applicable laws and regulations including the Resource Conservation and Recovery Act.

For Sales and Service Contact

Europe:
Dixon Group Europe Ltd.
Preston, England
Phone: +44 (0) 1772 323529
Fax: +44 (0) 1772 314664
Email: enquiries@dixoneurope.co.uk

Mexico:
Dixva, S. de R.L. de C.V.
Monterrey, N.L.
Phone: 01-800-00-DIXON (34966)
Fax: 01-81-8354-8197
E-mail: contactenos@dixonvalve.com.mx

Canada:
Dixon Group Canada Limited
Innisfil (Barrie), Ontario
Phone: 705-436-1125
Fax: 705-436-6251
Toll Free: 877-963-4966
E-mail: isales@dixongroupcanada.com

Asia Pacific:
Dixon (Asia Pacific) Pty Ltd Wingfield,
South Australia
Phone: +61 8 8202 6000
Fax: +61 8 8202 6099
E-mail: enquiries@dixonvalve.com.au

USA:
Dixon Bayco USA
Chestertown, Maryland
Phone: 410-778-2000
Fax: 410-778-4702
Toll Free: 800-355-1991
E-mail: dixonbayco@dixonvalve.com



The Right Connection®

dixonvalve.com